CITY TRUCK

All-Electric Heated Line Striper



The **EnDiSys**

City Truck All-Electric Heated Line Striper...

*SC-12 SKIP LINE CONTROL SYSTEM

- Full Color Display
- Pattern Preview
- Guided Calibration
- Internal Pulse Multiplier
- In-Field Software Updates
- Gun Height Adjustor
- Tandem Bead Switch
- Gun Blow Air Switch
- Four Gun Control

*OPTIONAL DATA LOGGER UPGRADE

- Video Overlay & Crosshair Generator
- Advanced Pattern Configuration
- Real Time Monitoring
- Control Peripheral Functions
- Integrated Data Logging
- Online Report Generator
- Bead Monitoring(2 Tanks)
- GPS with Built-in WiFi
- Additional Options Available





Home Office 14329 Northdale Blvd Rogers, MN 55374

Tel:(847) 626-8491

Illinois Office

Michigan Office Tel:(313) 597-5043

Texas Office Tel:(847) 626-8491



City Truck

www.EnDiSys.com

All-Electric Heated Line Striper

PUMP MODULES - UP TO 3 COLOR

- Graco XP Pumps Pumps
- 2:1 Mix Ratio
- Inlet Screens for Resin and Catalyst
- High Pressure Filters
- High Pressure Relief Valves
- Circulation Capability from Preheaters to Tank
- 3,000 PSI Max Fluid Pressure

• Electrically Driven Heat Exchangers

- 6,000 Watts for Resin
- 3,000 Watts per Catalyst
- Independently Monitored and Controlled per Zone

• 20Ft Electrically Heated Hose **Assemblies**

- 3/8" I.D. Nylon Core Hose for Resin
- 5/16" I.D. Nylon Core Hose for Cat
- 1/4"Air Tubing to Control Gun

• 50Ft Electrically Heated Hose (Optional) Assembly for White Hand Work

• Manual Air Purge Impingement (Optional)

Fusion Gun for Hand Work

- 2:1 Ratio Mix Chamber
- Airless Tip

COMMUNICATION SYSTEM OPTIONS

- David Clark Wired
- Setcom Wireless
- Sonetics Wireless

POWER PLANT - Integrated Assembly Packaged into One Self-Contained Module

- 70 HP Cummins Diesel
- Liquid Cooled
- Easy to Service
- Low Oil Pressure Alarm
- High Temp Alarm
- Hour Meter
- 28 gallon fuel tank

• Hydraulic Pump System

- Variable Displacement Pressure Compensated Piston Pump
- 20 GPM Max Flow Rating
- 1,800 psi Max Pressure
- Cyclone Hyd Reservoir
- Integrated Oil Cooler

• Integral Screw Air Compressor

- 40 CFM at 100 psi
- Direct Driven from Power Plant
- 30 gallon ASME Air Tank
- Filter/Separator
- After Cooler & Auto Tank Drain

• 40 KW Generator

- 208 VAC 3-Phase Power

POLYUREA ADD-ON (OPTIONAL)

NITROGEN TANK STANDARD REGULATOR

AGITATION WITH TIME CIRCUIT

60 OR 100-GALLON HEATED STORAGE TANKS

- ASMF Rated Tank
- 2.0" npt Bottom Outlet
- Glycol Skirted Base with 3,000 Watt **Immersion Heater**
- Expansion Tanks for Glycol
- Heaters Wired to 120VAC/20A
- Shore Power Switch

150-GALLON BEAD STORAGE TANKS


- ASME Rated Tank
- 2.0" npt Bottom Outlet
- White Painted Carbon Steel
- Automated Scale System Tied into Skip **Line Control**
- Vacuum Tank Fill System

CARRIAGE SYSTEM

- Graco AutoFusion Spray Guns
- 2:1 Mix Ratio Mix ChamberS
- Airless TipS
- Electric Manifold HeaterS
- Remotely Driven Gun Adjusters
- 3-Foot Carriage Travel Adjustment
- Bead Gun Applicators
- · Rapid adjustment cross bars
- Dual Wheel
- Sliding Mounts For Quick Adjustments

CAMERA SYSTEM (OPTONAL)

- (2) Digital Cameras
- Manual In/Out Adjustment
- OR In-Cab Electronic Adjustment

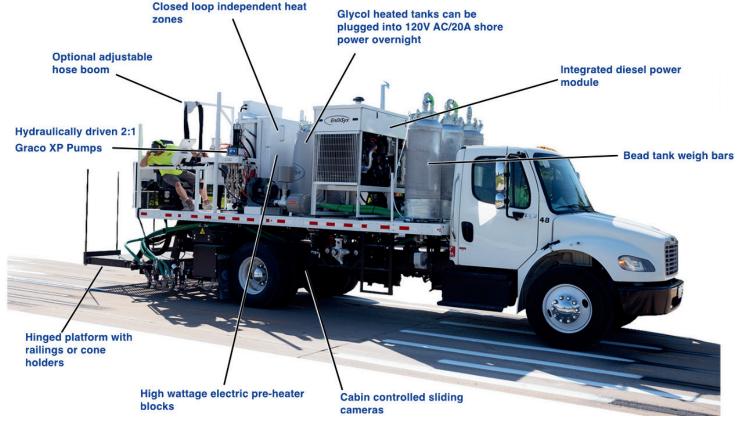



Home Office

14329 Northdale Blvd Rogers, MN 55374 Tel:(763) 428-5075

Illinois Office Tel:(847) 626-8491

Michigan Office

Texas Office Tel:(313) 597-5043 Tel:(847) 626-8491

